



Grade:	DKT_1
Description:	A general purpose metallic foil for the graphics sector.
Main characteristics:	Designed for difficult inks, varnishes and coated stocks. Has worked on dynes levels as low as 30. Suitable for fine detail work.
Fields of application:	Packaging for wine & spirits, cosmetic cartons & gift packaging.
Definition:	Fine to Medium
Stamping method:	Vertical, Platen, Cylinder & Rotary
Working temperature:	Vertical 100 – 130 °C Platen 100 – 130 °C Cylinder 130 – 160 °C Rotary 150 – 210 °C

This should just be used as guidance due to the fact that the temperature is directly related to speed of machinery.

Manufactured widths:	640mm, 710mm, 790mm, 1280mm 1420mm & 1580mm <i>Not all colours are held in these widths.</i>
Manufactured thickness:	12 Micron Polyester

Please note that this information should be used as a guide only and not as a guarantee of suitability due to the wide variety of substrates and working methods used. We would recommend that a foil sample is tested prior to purchase. We endeavour to keep our foils in stock however please be advised that stock levels do fluctuate depending on demand and we therefore recommend that you contact the office for up to date stock information prior to ordering.

Product Data Sheet V.1.0.4

Date Issued 26.08.2026

Office Controlled


Address:

Foilco Limited
Enterprise Way
Lowton St Mary's
Warrington, Cheshire
WA3 2BP
United Kingdom

Phone: +44 (0) 1942 262622
Enquiries: hello@foilco.com

LinkedIn: foilcoltd
Twitter: foilco
Instagram: foilcoltd
Website: www.foilco.com

Company No. 2140459 / VAT Reg. No. GB 468117042

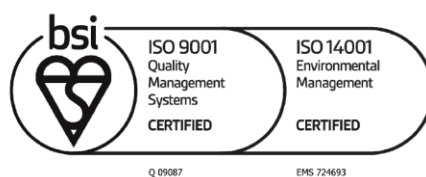

**ZERO FOIL
TO LANDFILL**